WW-5-0204-2

ID# WW-5-0204-2 PROJECT DOCKET SHEET

Also see EC-5-2814

DATE	REVIEW ACTION
7/22/96	Info rcvd - No BK & Pg
8/7/96	Rcvd BK & Pg
8/14/96	Logged in
9/5/96	See ~~WW~~ EC-5-2815 for notes

PROJECT DOCKET SHEET

PROJECT ID: WW-5-0204-2

PIN #: BR96-0241

LANDOWNER

Town of Waitsfield School District
Waitsfield Elementary School
Route 100
Waitsfield, VT 05673

APPLICANT

TOWN: WAITSFIELD

DEVELOPMENT NAME:

ROAD/STREET: RT 100

PROJECT DESCRIPTION: allow General Waite house to connect to school's water supply, Also see EC-5-2814 and WW-5-0946

FEE RECEIVED: EXEMPT - Mun
BOOK(S) & PAGE(S):

DATES:

RECEIVED: 8/7/96
LOGGED IN: 8/14/96
INITIAL REVIEW: 9/6/96
RESPONSE: 9/6/96
FINAL ACTION: 9/6/96
FINAL ACTION TYPE: P

CONSULTANT NAME & ADDRESS: Charles Grenier;P.O.Box 445;Waterbury;05676

REVIEWER: Marsha Thompson

COMPLETED PROJECT INFORMATION

MINOR PROJECT: N

DEFERRALS: Conveyed/Retained:
Contiguous/Non-Contiguous:

WATER SYSTEM TYPE: S

WATER VOLUME: 0

WASTEWATER SYSTEM TYPE: N

WASTEWATER VOLUME: 0

LOTS APPROVED: 0

MOUNDS APPROVED:

CONDITIONS: none

RECEIVED
FEB 12 1998
DIVISION OF PROTECTION

CHARLES GRENIER
CONSULTING ENGINEER PC
BOX 445 244-6413
WATERBURY, VT. 05676

February 10, 1998

State of Vermont
District #5 Environmental Office
Attn: Marsha J. Thompson, Asst. Regional Engineer
324 North Main Street
Barre, Vermont 05641

RE: Town of Waitsfield, General Wait House, Permits EC5-2814, EC5-2815, WW5-0204-2, and WW5-0946

Dear Marsha:

In accordance with the above mentioned permits, my office was retained to stake out and inspect the installation of the leachfield system for the renovation of the General Wait House. The general contractor was Wells Construction and on May 7, 1997 we staked out and set grades for the leachfield. During the week of May 12, 1997 the leachfield was installed and inspected by our office. The forcemain was pressure tested at 50 psi for two hours and we witnessed the cycling of the pump station and observed effluent being equally distributed into the leachfield. It is our opinion that the Town of Waitsfield is in conformance with its permits for the project.

If any questions arise, please do not hesitate to contact us.

Respectfully,

Charles J. Grenier
Consulting Engineer, P.C.

CJG:lar/mt021098

cc. Town of Waitsfield
Town of Waitsfield School District

State of Vermont

AGENCY OF NATURAL RESOURCES
WATER SUPPLY AND WASTEWATER DISPOSAL

LAWS/REGULATIONS INVOLVED: 10 V.S.A., Chapter 61, Water Supply and Wastewater Disposal and Environmental Protection Rules;
Chapter 4, Public Buildings
Chapter 7, Sewage Disposal
Chapter 21, Water Supply
Appendix A, Design Guidelines

CASE No: WW-5-0204-2
APPLICANT: Town of Waitsfield School District
Waitsfield Elementary School
ADDRESS: Route 100
Waitsfield, VT 05673

PIN No.# BR 96-0249

This project, consisting of allowing General Waite house to connect to the school's water supply, located on Route 100 in Waitsfield, Vermont, is hereby approved under the requirements of the regulations named above, subject to the following conditions:

1. GENERAL CONDITIONS

1.1. The project must be completed as described on the plans and/or documents prepared by Charles Grenier and listed as follows:
Site Plan, last revised 7/19/96,
Site Details, last revised 7/19/96,
and which have been stamped "APPROVED" by the Department of Environmental Conservation. No alteration of these shall be allowed except where written application has been made to the Agency of Environmental Conservation and approval obtained.

1.2. A copy of the approved plans and the Water Supply and Wastewater Disposal Permit shall remain on the project during all phases of construction and, upon request, shall be made available for inspection by State or Local personnel.

1.3. This project has been reviewed and is approved with an existing school and fire station. No other buildings are allowed without prior review and approval by the Agency, and such approval will not be granted unless the proposal conforms to the applicable laws and regulations.

1.4. No alterations to the existing building other than those indicated on the approved plan, which would change or affect the water supply or wastewater disposal shall be allowed without prior review and approval from the Agency of Natural Resources.

1.5. This authorization does not relieve you, as applicant, from obtaining all approvals and permits as may be required from the the Department of Labor and Industry (phone 828-2106), and local officials PRIOR to construction.

1.6. All general conditions set forth in Water Supply and Wastewater Disposal Permit number WW-5-0204-1, dated 6/17/91, shall remain in effect except as amended or modified herein.

2. WATER CONDITIONS

2.1. All water conditions set forth in Water Supply and Wastewater Disposal Permit number WW-5-0204-1, dated 6/17/91, shall remain in effect except as amended or modified herein.

2.2. Approval of this permit allows the General Waite house to connect to the existing water supply system.

(CONTINUED)

3. SEWAGE DISPOSAL CONDITIONS

3.1. All sewage conditions set forth in Water Supply and Wastewater Disposal Permit number WW-5-0204-1, dated 6/17/91, shall remain in effect except as amended or modified herein.

William Brierley, Commissioner
Department of Environmental Conservation

By John Kinnesrok, Jr 9-6-96
for Marsha J. Thompson, Assistant Regional Engineer

CC Charles Grenier
Waitsfield Planning Commission
VT Dept. of Labor & Industry
Central Office of Wastewater Management Division

State of Vermont

Department of Fish and Wildlife
Department of Forests, Parks and Recreation
Department of Environmental Conservation
State Geologist

AGENCY OF NATURAL RESOURCES
Department of Environmental Conservation
Barre Regional Office
324 North Main Street
Barre, VT 05641
Telephone 479-3621

Waitsfield School District
Waitsfield Elementary School
Route 100
Waitsfield, VT 05673

RE: EC-5-2814, reconfiguration of lot by boundary line adjustment with adjacent property,
WW-5-0204-2, allow General Waite house to connect to school's water supply, RT 100, Waitsfield

Dear Applicant:

We received your completed application for the above-referenced project on August 7, 1996. Under the performance standards for this program, we have a maximum of 45 days of "in-house" time to review your application.

If we need further information from you in order to reach a decision on your application, the time we wait for your submittal of that information does not count against the allowable in-house time specified in the performance standard.

If you have any questions about the review process, or if you have not received a decision on your application within the permitted time of 45 days in-house, please contact this office at (802) 479-3621.

We have forwarded the information contained in your application to the Information Specialist for this region. A Project Review Sheet will be sent to you indicating other state agencies and departments you should contact regarding additional permits or approvals you may need under their programs. If you have not already done so, you should also check with town officials regarding any local requirements you may need to meet.

For the Division of Wastewater Management

Alida J. Van Der Berg
Administrative Secretary

CC Charles Grenier
Waitsfield Planning Commission

Rev. 5/26/93

RECEIVED
JUL 11 1996

AGENCY OF NATURAL RESOURCES
DEPARTMENT OF ENVIRONMENTAL CONSERVATION
PERMITS, COMPLIANCE & PROTECTION DIVISION

FOR OFFICE USE ONLY
Permit # WW-5-0204-2
Date Application Received
Fee Received
Check #

RECEIVED
AUG - 1 1996
DIVISION OF PROTECTION

WATER SUPPLY AND WASTEWATER DISPOSAL
(Schedule "C" to Master Act 250 Land Use Permit Application)

THERE IS TO BE NO SITE WORK OR CONSTRUCTION COMMENCED ON THIS PROJECT WITHOUT WRITTEN APPROVAL FROM THE AGENCY OF NATURAL RESOURCES.

LANDOWNER:
Name: WAITSFIELD SCHOOL DISTRICT
(As shown on Deed for Property)
Mailing Address: WAITSFIELD ELEMENTARY SCHOOL, ROUTE 100, WAITSFIELD, VT. 05673
Tele. No.: 496-3643

CO-APPLICANT:
Name: TOWN OF WAITSFIELD
Mailing Address: BOX 1, BOX 390 ROUTE 100, WAITSFIELD, VT. 05673
Tele. No.: 496-2218

Business Name (if other than above):

CONSULTANT: (architect, engineer, site technician)
Name: CHARLES GROOVER, CONSULTING ENGINEER, P.C.
Address: (mailing) P.O. BOX 445 (Street) WATERBURY (Town) VT. (State) 05676 (Zip) Tele. No. 244-6413

A. PROJECT LOCATION: (Attach Map)
Town: WAITSFIELD Road/Highway: ROUTE 100

B. When was the parcel created?

C. List any prior Environmental or Act 250 permits issued for A above: WW5-0204 and 0204-1, #5-0221, WW5-0298

D. Describe the project (be specific: see item #1 on back) (Attach 2 sets of plans)
4TH LEG THAT ELEMENTARY SCHOOL WATER SYSTEM FOR THE GROUNDS, WAIT HOUSE CONVERSION TO A MUNICIPAL BUILDING OFFICE

E. TYPE OF WATER SOURCE: (Municipal, offsite, community, onsite) DRILLED WELL
(Attach approval - see #6 on back)

F. Does this water supply serve 2 or more buildings? YES, SCHOOL, FIRE STATION AND GOV. WAIT HOUSE

G. TYPE OF SEWAGE DISPOSAL: (municipal, offsite, community, onsite) ONSITE SEWAGE
(if municipal, attach approval - see #5 on back)

H. Number of gallons of sewage generated:

Existing Flows: Proposed Flows: 270 GPD Total Flows: 270 GPD

I. APPLICATION FEE: ($0.36 per gallon or design flow of project - minimum fee of $100.00 per application.) Make check payable to STATE OF VERMONT. (Municipalities Exempt)

AMOUNT ENCLOSED $ No Fee Required

7/16/96 DATE — Carol R. Hilsdon — SIGNATURE OF LANDOWNER

7/15/96 DATE — William Bryant, Town of Waitsfield — SIGNATURE OF CO-APPLICANT

CHARLES GRENIER
CONSULTING ENGINEER PC
BOX 445 244-6413
WATERBURY, VT. 05676

RECEIVED
AUG - 1 1996
DIVISION OF PROTECTION

July 18, 1996

State of Vermont
Attn: Marsha J. Thompson, Asst. Regional Engineer
District #5 Environmental Office
324 North Main Street
Barre, Vermont 05641

RE: Waitsfield School District and Town of Waitsfield, General Wait House Project, Route 100, Waitsfield

Dear Marsha:

After a telephone conversation with Alida Conti, we have attached the following four permit applications.

1. A Water Supply and Wastewater Disposal permit application for the Town of Waitsfield to convert the historic General Wait House into a municipal building housing small office enterprises such as the Chamber of Commerce and Visitors Information Center, the Mad River Valley Planning District, the WDEV Radio Station, the Waitsfield Historical Society, Friends of the Mad River, Mad River Valley Path Associates, etc., and a small office space for leasing.

2. A Water Supply and Wastewater Disposal permit application to abandon use of an old spring on the opposite side of Route 100 and serve the General Wait House with a new water line from the School's water system. This application will be the second amendment to permit WW5-0204.

3. A subdivision permit application for the Town to reconfigure the General Wait House lot. The Waitsfield School District will obtain control of the land immediately north of the General Wait House in exchange for the Town controlling the land south of the General Wait House where the proposed leachfields are located and also the driveway to the Fire Station. As a result of these changes, the General Wait House lot increases in size from 0.9± to 1.3± acres and the Waitsfield Elementary School property decreases in size from 5.6± to 5.2± acres.

4. We have enclosed a separate subdivision application form for the Waitsfield School District for the transaction described in #3.

The purpose of these applications is to allow the historic General Wait House to be converted into a municipal office building. The design flow is estimated at 270 gallons per day, with a 10 percent water saving credit, based upon a maximum of 10 employees in the building and an additional allowance of 150 GPD for occasional visitors to the Chamber of Commerce and small meetings with various Town Committees. The engineering plans show a new trench leachfield system on the south side of the building with a maximum capacity of 615 GPD. Original soil testing on this property was done on November 6, 1990 in the presence of State Regional Engineer Eric Blatt. There was some evidence of a seasonal groundwater table. Therefore, a very detailed groundwater monitoring program was established in the spring of 1991. The result of the spring monitoring were submitted to Eric Blatt and we received a February 5, 1992 letter in which Mr. Blatt concurred with our monitoring program and with our conclusions that the proposed septic area is suitable for an inground leachfield system. We have attached all correspondence relative to the soil testing.

RECEIVED
1992
DIVISION OF PROTECTION

The General Wait House, which is not in use at this time, is served by a spring on the opposite side of Route 100. The spring is shared by the Bonnette residence, the Clear Water Canoe building, and by Barry Bender. We have recommended that the General Wait House be served by a recently constructed water system for the Waitsfield Elementary School under permits WW5-0298 and WW5-0204. The General Wait House will tap off the water main was constructed in 1991 to serve the Fire Station. We have attached calculations which show that the pressure setting needs to be increased to 40/60 to provide adequate pressure for the new office. Furthermore, our calculations show that the total school water storage is 5000 gallons. The School at the present time is permited for 230 students and the Fire Station allocation is 320 GPD. With the General Wait House project, there is a surplus flow of 960 GPD. If the School were to expand in the future and install water saving fixtures, it could be expanded by a maximum of 96 students bringing the total School population to 326. The 4500 GPD School septic system with the water saving credit, has a capacity of 333 students. The School wants to be on record with the State that there is still significant surplus capacity in the School's septic and water systems for future expansion. At the present time the School is not at capacity.

As a result of this information we hope you can process the applications. If any questions arise, please do not hesitate to contact us.

Respectfully,

Charles J. Grenier
Consulting Engineer, P.C.

CGJ:lar/mt071096

cc. William Bryant
Carol Hosford
Jay White

State of Vermont

Agency of Natural Resources
Wastewater Management Division

Plan/Design Review Checklist

Permit ID#: _____

Applicant: TOWN OF WAITSFIELD
Consultant: WAITSFIELD SCHOOL DISTRICT
Site Visit: X Yes/Date of Visit: ERIC BLATT 11/6/90 CHARLES GROVER
Application Complete: ___Yes ___No (See attached checklist)
Reviewer: MARSHA THOMPSON

RECEIVED
DIVISION OF PROTECTION

A: SITE PLANS

X 1. LOCATIONS TO SCALE - proposed, existing, pre. appv'd water sources primary and replacement leachfields identified within area of evaluation on plans to scale. Water & sewer easements shown if applicable. Lot layout shown with dimensions.
X 2. BUILDINGS - show all existing & proposed buildings and label uses.
X 3. ROADS/DRIVEWAYS - show all existing and proposed roadways & driveways within wastewater isolation distance.
X 4. LOCATION OF WATER SUPPLY and its presumptive minimum separation zone (well Shield) including elevation contours.
X 5. TEST PITS/PERCOLATION TEST - proper number and location. ATTACHED LOGS
X 6. CONTAMINATION SOURCES - all sources of contamination identified within required area of evaluation.
X 7. CONSTRUCTION BENCHMARK - at least one permanent benchmark labeled.
___8. SURFACE WATER - show all lakes, streams, ponds, marshes, & other surface water features. THRESHOLD G.W. HOUSE
X 9. GROUNDWATER MONITOR LOCATIONS/READING - proper number, location, results
X 10. TOPOGRAPHY - applicable existing & proposed contours near disposal areas. Show limits of 100 year flood plain if applicable. N.A COMPLETE
X 11. CONSULTANTS SIGNATURE AND/OR SEAL.

B: WASTEWATER DESIGN

X 1. DESIGN BASIS - design flow & how calculated. PLAN SHEET + LETTER
X 2. SOIL PROFILES - color, texture, layers, SHWT & bedrock for each pit. LOGS
X 3. PERCOLATION RESULTS - depth of test(s), rate in mpi, type if test.
X 4. DISPOSAL AREA TO BEDROCK and SEASONAL HIGH WATER TABLE SEPARATION - required separation between bottom of field & bedrock maintained.
X 5. DISPOSAL AREA SIZE - disposal area based on calculations.
X 6. DISPOSAL AREA SLOPE - maximum slope in the disposal area must be indicated on the plan.
X 7. SEPTIC SYSTEM DETAILS - including specifications & constructions notes, on both plan & sectional views.
X 8. ISOLATION DISTANCES - leachfields, pipes, tankage, must meet required isolation distances.
X 9. WASTEWATER TANKAGE PROPERLY SIZED WITH DETAILS - septic tanks, pump chambers & tanks required size.
N.A 10. CURTAIN DRAIN DETAIL-plan & sectional views, including specifications and construction notes.
X 11. LEAKAGE TEST/FORCEMAINS-required leakage test procedures for manholes, sewerline/forcemains, and tankage in notes.
___12. SUPPORTIVE CALCULATIONS Not Needed - SHEET #2 OF PLANS

C: WATER SUPPLY DESIGN

X 1. DESIGN BASIS - design flow and how calculated. CALCULATIONS
N.A 2. CONSTRUCTION DETAILS - shallow water supplies. N.A
X 3. WATER DISTRIBUTION SYSTEM - properly sized, with details & calculations, if applicable.
X 4. ISOLATION DISTANCES - leachfields, water sources, pipes, tankage, must meet required isolation distances.
X 5. WATER QUALITY INFORMATION-conducted at a certified lab & quality meets standards as required. EXISTING WELL-TESTED REQUIRED
X 6. WATER QUANTITY INFORMATION - well drillers completion report provided. All pump test interference monitoring, as required. Yield potential evidence may be required for multiple lot subdivisions. 5000 GALLON SCHOOL STORAGE IS ADEQUATE FOR EXISTING WELL

State of Vermont

Department of Fish and Wildlife
Department of Forests, Parks and Recreation
Department of Environmental Conservation
State Geologist
Natural Resources Conservation Council

AGENCY OF NATURAL RESOURCES

Department of Environmental Conservation
Barre Regional Office
324 North Main Street
Barre, VT 05641

Telephone 479-3621

AUG - 1 1992
DIVISION OF PLANNING

February 5, 1992

Charlie Grenier
Box 445
Waterbury, VT 05676

Re: General Wait house, 1991 spring ground water monitoring, located off Route 100, Waitsfield, VT

Dear Charlie:

This letter follows our January 31, 1992 phone conversation regarding the above-referenced project. I have reviewed the ground water monitoring results for the spring of 1991 and concur with your conclusions.

At this point if the owner wishes to obtain a permit to convert the use of the building an application should be submitted with 2 sets of plans and the appropriate fee. Additionally, a written agreement will need to be obtained from the school board to allow the placement of wastewater disposal systems either on the school's property or less than 25 feet from the school's property.

If you have any questions, please contact me at this office.

Sincerely,

Eric Blatt
Regional Engineer

CHARLES GRENIER
CONSULTING ENGINEER PC
BOX 445 244-6413
WATERBURY, VT. 05676

December 11, 1991

Eric Blatt, Regional Engineer
District #5 Environmental Office
324 North Main Street
Barre, Vermont 05641

RE: Springtime Monitoring Program, General Wait House, Route 100, Waitsfield

Dear Eric:

As you may recall, groundwater monitors were installed the same day that we jointly dug the test holes on the General Wait House property in Waitsfield. The test holes were dug on November 6, 1990 because at the time the Town of Waitsfield was considering purchasing the property for use as a Senior Citizen Center and municipal office. At March 1991 Town Meeting the Waitsfield citizens turned down the purchase of the property. However, during the interum, Christopher and Brenda Mack, the owners of the property along with Bruce Bareham instructed us to supervise monitoring the groundwater levels between March 1 and June 1 of 1991. This program was completed and in general no significant groundwater tables were discovered.

The monitors installed at test holes #1, 2, 3, 5, and 8 did record moisture in the bottom of the holes. Monitor #6 which was off the property near the corner of the cemetary on School land unfortunately filled in and good readings could not be obtained. After reviewing the notes, it appears that the highest seasonal groundwater table near test pit #1, the location of the existing leachfield, conservatively was not higher than 685.5 or 7' below the ground surface. Monitors near test pits #2 and 3 indicated that the seasonal water table conservatively was not at any time above 684.5, or 7' below the surface. Monitor #8 which is on the School property immediately south of the General Wait House indicated that at no time was the water table above elevation 686.5, or again 7' below ground surface.

The purpose of this letter is to finalize the groundwater monitoring program. Presently, the Town of Waitsfield senior citizens and Historical Society are pursuing a grant to purchase and convert the General Wait House into an exciting municipal project. If the grants are secured and the project goes forward, we want to

AUG - 1 1991
DIVISION OF PROTECTION

represent to the Town that the successful monitoring program will enable the construction of leachfields in the area north of the house or on School property to the south. We ask that you review the results of the program and make comments as necessary. Your prompt attention to this matter would be greatly appreciated.

Respectfully,

Charles J. Grenier
Consulting Engineer, P.C.

CJG:lar

cc. Chris Mack
William Bryant
William Gallup

CHARLES GRENIER
CONSULTING ENGINEER
BOX 445 244-6413
WATERBURY, VT. 05676

RECEIVED
AUG - 1 1996
DIVISION OF PROTECTION

GENERAL WAIT HOUSE
GROUNDWATER MONITORING PROGRAM
SPRING 1991

Date	Hole #1	Hole #2	Hole #3	Hole #5	*Hole #6	Hole #8
March 1	Dry	Moist	Dry	Dry	Moist	Dry
March 6	Dry	Moist	Dry	Moist	Moist	Dry
March 13	Moist	Moist	Dry	Moist	Moist	Dry
March 20	Moist	Moist	Dry	Moist	Moist	Dry
March 27	Moist	Moist	Moist	Moist	60" top pipe to water table (5" water)	Dry
April 3	Moist	Moist	Moist	Moist	Moist	Dry
April 10	Moist	Moist	Moist	Moist	61" top of pipe to water table (4" water)	Moist
April 17	Moist	Moist	Moist	Moist	Moist	Moist
April 24	Moist	Dry	Dry	Moist	Moist	Dry
May 1	Dry	Dry	Dry	Dry	Moist	Dry
May 8	Dry	Dry	Dry	Dry	Moist	Dry
May 15	Dry	Dry	Dry	Dry	Dry	Dry
May 22	Dry	Dry	Dry	Dry	Dry	Dry
May 29	Dry	Dry	Dry	Dry	Dry	Dry

*Pipe partially filled with silt and sand

CHARLES GRENIER
CONSULTING ENGINEER PC
BOX 445 244-6413
WATERBURY, VT. 05676

RECEIVED
AUG - 1 1996
DIVISION OF PROTECTION

GENERAL WAIT HOUSE
MONITOR PIPE ELEVATIONS

Mon. #	Top of Pipe	Ground	Bottom of Pipe	Bottom of Pipe Below Ground
1	694.8	692.3	684.8	7.5'
2	694.Ø	691.8	684.Ø	7.8'
3	693.3	691.3	683.3	8.Ø'
5	694.4	692.8	684.4	8.4'
6	694.5	692.9	*684.4	8.5'
8	696.Ø	693.7	686.Ø	7.7

*Pipe partially filled with sand to 689.4±, actual bottom of pipe @ 684.4

CHARLES GRENIER
CONSULTING ENGINEER PC
BOX 445 244-5413
WATERBURY, VT. 05676

RECEIVED
AUG -- 7 1996
DIVISION OF PROTECTION

TEST PIT LOGS
GENERAL WAIT HOUSE
ROUTE 100, WAITSFIELD
NOVEMBER 6, 1990

These test pits were dug in the presence of Charles J. Grenier, Consulting Engineer; Eric Blatt, State Regional Engineer; William Bryant, Waitsfield Administrative Assistant; and Charles Goodman, Selectmen.

Test Pit #1 (monitor installed)
0" - 10" Dark brown topsoil
10" - 23" Very fine sandy loam
23" - 50" Very fine more compact sandy loam, mottled
50" -112" Coarse gravel
50" - 60" Not mottled
60" -112" Grey color, stained throughout

Test Pit #2 (monitor installed)
0" - 12" Dark brown topsoil
12" - 41" Fine friable brown sand, sandy loam
41" - 69" Heavily stained very fine sands, silts, blueish grey with pronounced iron staining in layers, slightly firm
69" -110" Heavily mottled and stained coarse gravel

Test Pit #3 (monitor installed)
0" - 12" Dark brown topsoil
12" - 41" Fine brown loose sand and sandy loam, mottled 36" - 41"
41" -108" Coarse clean gravel, some staining, no conclusive evidence of highest seasonal water table water @ 108"

Test Pit #4
0" - 15" Dark brown topsoil
15" - 34" Friable brown very fine sand, sandy loam
34" - 55" Grey firm fine sand, heavy iron staining
55" -102" Coarse gravel, very heavily stained, water @ 93"

Test Pit #5 (monitor installed)
0" - 10" Dark brown topsoil
10" - 43" Fine friable sand, sandy loam
43" - 67" Grey brown more firm, heavily mottled, fine sand, some silt
67" -115" Coarse heavily stained gravel
Water @ 115"

RECEIVED
AUG - 7 1996
DIVISION OF PROTECTION

Test Pit #6 (monitor installed)
0" - 10" Brown topsoil
10" - 41" Loose fine sand, sandy loam
41" - 75" Fine grey sand, heavily stained
75" -110" Coarse heavily stained gravel

Test Pit #7
0" - 8" Dark brown topsoil
8" - 20" Fine brown sandy loam, fine sand, drainage mottling
20" - 58" Loose medium brown sand, no mottling
58" - 90" Stained sand, medium to coarse sand, orange and red stains

Test Pit #8 (monitor installed)
0" - 7" Dark brown topsoil
7" - 15" Loose brown sand
15" - 24" Fine sand, sandy loam, faint drainage mottles
24" - 66" Loose coarse sand, brown
66" - 96" Coarse sand and gravel, stained throughout

Test Pit #9
0" - 10" Brown topsoil
10" - 39" Fine sand, sandy loam
39" - 96" Coarse brown gravel, no mottles, very pronounced manganese stains @ 72", heavy red iron stain below
30" - 39" Faint mottling

Test Pit #10
0" - 8" Brown topsoil
8" - 24" Fine brown sand, sandy loam
24" - 53" Medium to coarse sand, loose, no mottles
53" - 85" Heavily stained gravel, dry

The water table in the Fire Department Spring was measured at 127" from the ground surface.

CHARLES GRENIER
CONSULTING ENGINEER PC
BOX 445 244-6413
WATERBURY, VT. 05676

RECEIVED
AUG - 7 1996
DIVISION OF PROTECTION

PERCOLATION TESTS
DECEMBER 11, 1991
GENERAL WAIT HOUSE
ROUTE 100, WAITSFIELD

Perc Test Number	Location	Rate (minutes/inch)
1	near test pit #3	5
2	near test pit #4	6
3	near test pit #7	5
4	near test pit #8	2
5	near test pit #10	3

CHARLES GRENIER
Consulting Engineer
P. O. Box 445
WATERBURY, VERMONT 05676
Phone 244-6413

JOB GENERAL WAITHOUSE PROJECT
SHEET NO. 1 OF 1
CALCULATED BY CJG DATE 7.10.96
CHECKED BY DATE
SCALE

RECEIVED
AUG - 7 1996
DIVISION OF PROTECTION

WATER SYSTEM DEMANDS

FIRE STATION:

WC	=	2
LAV	=	1
KIT. SINK	=	2
D.W.		2
ST.	=	7

GEN WAITHOUSE

6 WC	=	12
6 LAV	=	6
SINK	=	2
ST.	=	20
T	=	27
BUDGET	=	30

BOCA PLUMBING CODE @ 30 FU PEAK = 14.7 GPM
≅ 1200' OF 1¼" PVC @ 15 GPM 3'/100' = 36' OR 15.5 PSI LOSS
GOULDS 10E 0.5 Hp GOOD FOR 15 GPM @ 43 PSI
RESET PRESSURE FROM 30/50 to 40/60 TO ADEQUATELY PRESSURIZE THE SECOND FLOOR OF GEN WAIT HOUSE.

CONCLUSION) EXISTING WATER SYSTEM IS ADEQUATE WITH PRESSURE SETTING INCREASE


RESERVOIR CAPACITY CALCULATION:

TOTAL STORAGE = 5000 GALLONS

PRESENT SCHOOL DESIGN
230 STUDENTS x 15GID = - 3450
FIRE STATION - 320
GEN. WAITHOUSE = - 270
SURPLUS FLOW = 960
OR ÷ 15 = 64 students

IF THE SCHOOL EXPANDED AND RECEIVED 10% CREDIT
AN ADDITIONAL $\frac{3450(0.10)}{13.5} + \frac{960}{13.5}$, OR 96 STUDENTS COULD BE ADDED TOTAL 230+96 = 326

SCHOOL SEPTIC CAPACITY = 4500/13.5 = 333 STUDENTS

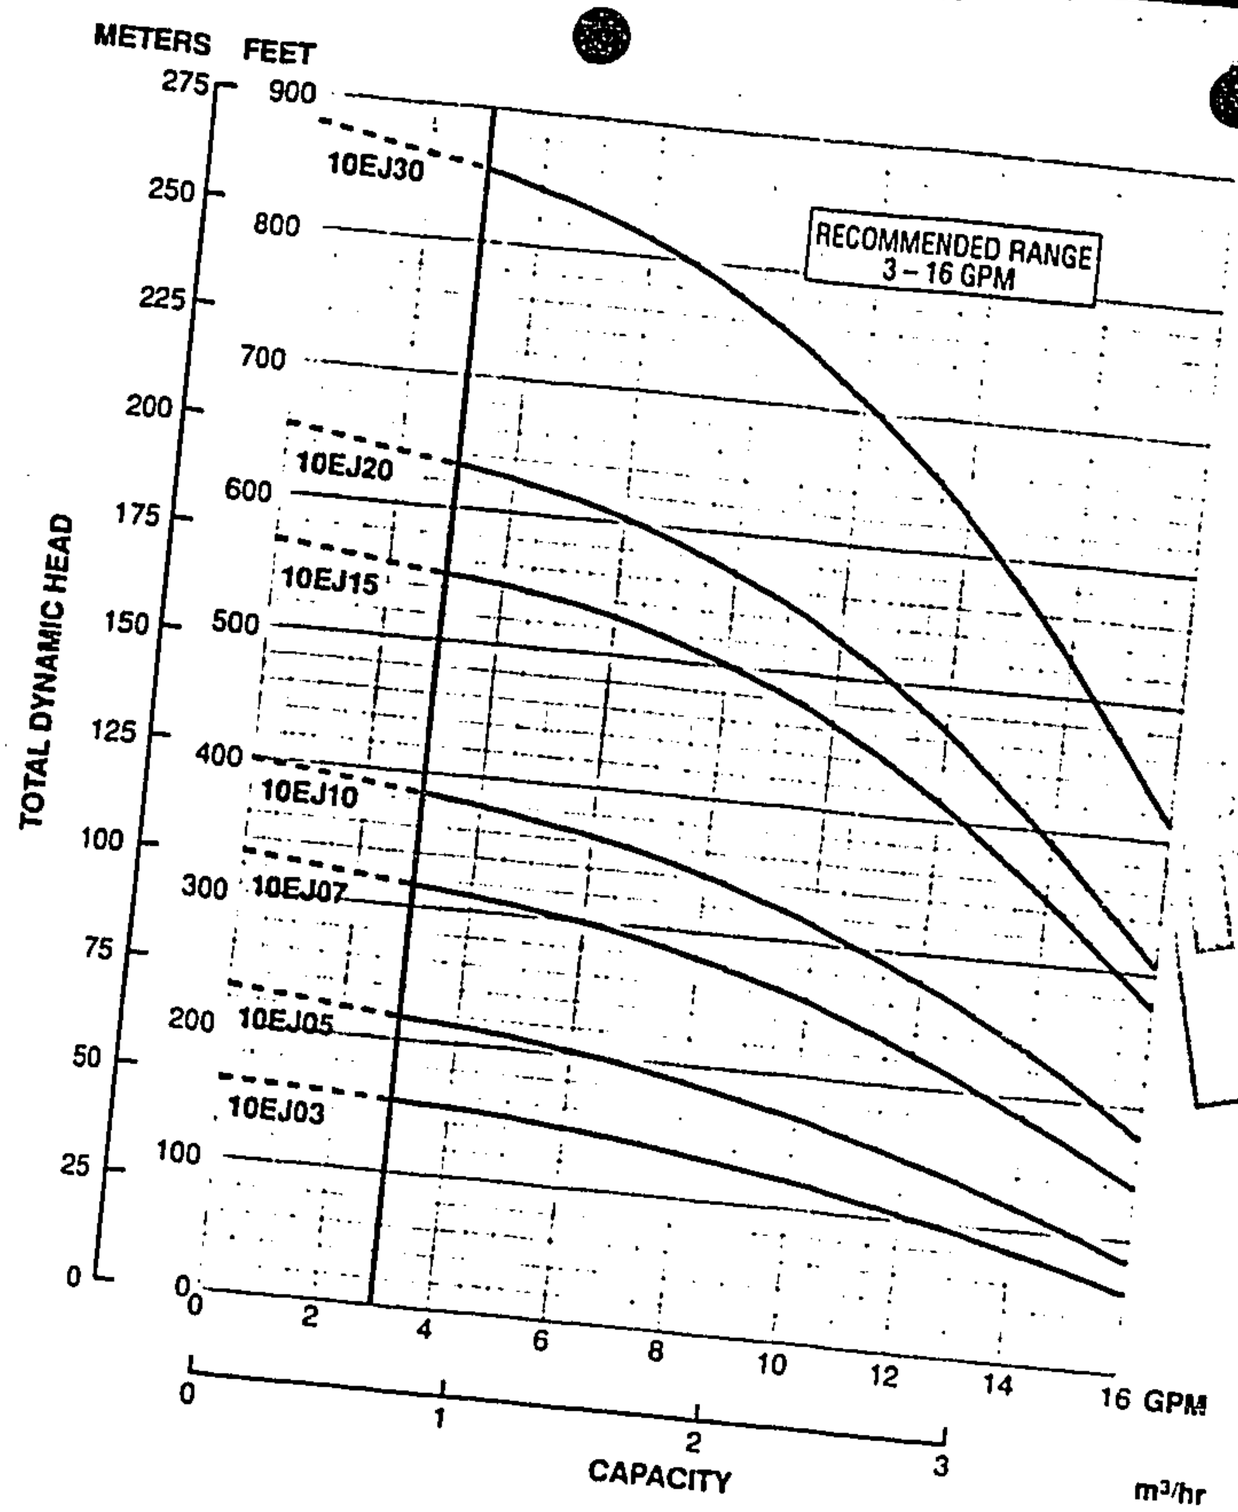

Goulds

Submersible Pumps

MODEL

10EJ


For 4" and larger wells

RECEIVED
AUG - 7 1996
DIVISION OF PROTECTION

DIMENSIONS AND WEIGHTS

HP	Stages	3-Wire Model No.	3-Wire Length	2-Wire Model No.	2-Wire Length	Wt. (lbs.)
½	5	10EJ03411, 12	21¼	10EJ03421, 22	21¼	28
½	7	10EJ05411, 12	23¼	10EJ05421, 22	28	31
¾	10	10EJ07412	26¼	10EJ07422	27¼	34
1	12	10EJ10412	29½	10EJ10422	30	39
1½	17	10EJ15412	36¼	10EJ15422	35¼	50
		10EJ15432, 34	34¼	–	–	45
2	20	10EJ20412	39	–	–	48
		10EJ20432, 34	37¾	–	–	46
3	27	10EJ30412	53¼	–	–	75
		10EJ30432, 34	50¾	–	–	66

(All dimensions are in inches and weights in lbs. Do not use for construction purposes.)

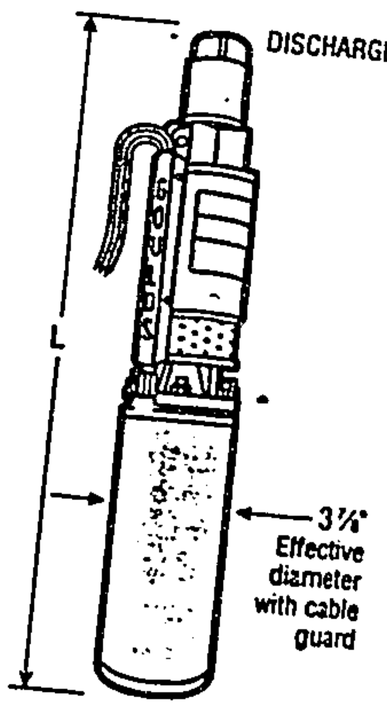

WATER TECHNOLOGIES GROUP
SENECA FALLS, NEW YORK 13148

SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE.

PRINTED IN U.S.A.

From: "Scott Stewart" <SCOTT@getwet.anr.state.vt.us>
Organization: Water Supply Division
To: "Susan Haitsma" <SHAITSMA@anrbarre.anr.state.vt.us>
Date sent: Thu, 25 Jul 1996 12:06:57 EST
Subject: Re: Waitsfield Elementary School--WSID 6718
Priority: normal

This new connection to the school system would need to be reviewed by the Regional Engineer. They should make sure the school source has enough capacity to serve the new connection. We, at some point in time, may issue a permit to operate and do sanitary surveys of schools, etc. But this may not happen any time soon.

Scott Stewart
ANR/DEC
Old Pantry Building
103 S. Main Street
Waterbury, VT 05471-0403
(802) 241-3400 (ext.3426)
Scott@getwet.anr.state.vt.us

RECEIVED
AUG - 7 1996
DIVISION OF PROTECTION

AGENCY OF NATURAL RESOURCES (ANR) AND ENVIRONMENTAL BOARD (ACT 250)

PROJECT REVIEW SHEET

THIS IS NOT A PERMIT

TOTAL # DEC PERMITS 3-4
RESPONSE DATE
DISTRICT 5 TOWN WAITSFIELD PENDING APPLICATION # EC 5-2814 & WW 5-0242 PIN #

OWNER OF PROJECT SITE: BR96-0242	APPLICANT ~~OR REPRESENTATIVE~~: BR96-0241A
NAME: Town of Waitsfield	NAME: Waitsfield School District
ADDRESS: RD#1, Box 390	ADDRESS: Route 100
Waitsfield 05673	Waitsfield 05673
TELEPHONE: 496-	TELEPHONE: 496-3643

Based on information provided by Charles Grenier on 7/22/96 a project was reviewed on a tract/tracts of land of _____ acres, located on Route 100. The project is generally described as:

(1) Land swap between Waitsfield School District and Town of Waitsfield so that the leachfields for the General Wait House and the driveway to the fire station will be owned by the Town. Town will own 1.3 acres + Elementary School will own 5.2 acres.
(2) Renovation of General Waite House for offices, including construction of a new leachfield and connection to the school water system.

Prior Permits From This Office: School - EC-5-0204, PB-5-0221, WW-5-0295, WSID

PERMITS NEEDED FROM THE DISTRICT ENVIRONMENTAL OFFICE PRIOR TO COMMENCEMENT OF CONSTRUCTION

1. ACT 250: THIS IS A JURISDICTIONAL OPINION BASED UPON AVAILABLE INFORMATION. ANY NOTIFIED PARTY OR INTERESTED PERSON AFFECTED BY THE OUTCOME MAY APPEAL TO THE ENVIRONMENTAL BOARD (ACT 250) WITHIN 30 DAYS OF THE ISSUANCE OF THIS OPINION (10 V.S.A. SEC. 6007(C)).

Commercial, residential or municipal project? _____ Length of new/improved road(s) _____
Has the landowner subdivided before? ____ When/where/# of lots _____
AN ACT 250 PERMIT IS REQUIRED: ____YES __X__NO; Copies sent to Statutory Parties: ____YES ____NO
COMMENTS:

Municipal projects - less than ten acres involved.

SIGNATURE: Donna Peck DATE: 7/25/96 ADDRESS (IF DIFFERENT): _____
(Assistant) District Coordinator Telephone 802 479-3621

(2) **WASTEWATER MANAGEMENT DIVISION REGIONAL OFFICE: PERMIT/APPROVAL REQUIRED** ✓ YES ____ NO

✓ Water Supply & Wastewater Disposal ✓ Subdivision &/or Exemption ____ Deferral of Subdivision
____ Tent/Travel Trailer Campground ____ Mobile Home Park ____ Sewer Extension
REGIONAL ENGINEER ASSIGNED: MARSHA THOMPSON

SIGNATURE: Susan Hartman DATE: 7/24/96 ADDRESS:
✓ Environmental Assistance Division
____ Wastewater Management Division Telephone: 802 479-3621

Wastewater Management Div.
Department of Environmental Conservation
324 North Main Street
Barre, VT 05641

THIS IS A PRELIMINARY, NON-BINDING DETERMINATION REGARDING OTHER PERMITS YOU MAY NEED PRIOR TO COMMENCEMENT OF CONSTRUCTION

3. WASTEWATER MANAGEMENT DIVISION, ANR (802-241-3822) Contact: _____

____ Discharge Permit; pretreatment permits; Industrial, municipal
____ Indirect discharge permit
____ Stormwater permits
____ Residuals management sludge disposal

(OVER)

OTHER PERMITS YOU MAY NEED: (Continued)

4. AIR POLLUTION CONTROL DIVISION, ANR (802-241-3840) Contact:_____

____ Construction/modification of source
____ Furnace Boiler Conversion/Installation
____ Waste oil burning
____ Industrial Process Air Emissions
____ Open Burning
____ Diesel Engines (≥ 200 bHP)

5. WATER SUPPLY DIVISION, ANR (802-241-3400) Contact: WSD6718 SCOTT STEWART

____ Underground Injection control (Floor Drains)
____ Construction Permit, water system improvements
_X_ Well head protection areas
_X_ Permit to operate
____ Bottled Water
____ New Source

6. WATER QUALITY DIVISION, ANR Contact:_____

____ Hydroelectric Projects (241-3770)
____ Shoreland encroachment (241-3777)
____ Wetlands (241-3770)
____ Stream Alteration (748-8787/786-5906)
____ Use of chemicals in State waters(241-3777)
____ Aquatic nuisance control (241-3777)
____ Section 401 Water Quality Certificate; (241-3770)
____ Water Withdrawal (241-3770)

7. WASTE MANAGEMENT DIVISION, ANR Contact:_____

____ Hazardous waste treatment, storage, disposal facility certificate (241-3888)
____ Hazardous waste handler notification requirement (241-3888)
____ Lined landfills; transfer stations, recycling facilities, drop off (241-3444)
____ Disposal of inert waste, untreated wood & stumps (241-3444)
____ Underground Storage Tanks (241-3888)
____ Asbestos Disposal (241-3444)
____ Composting Facilities (241-3444)
____ HW transporter certificate (241-3888)

8. FACILITIES ENGINEERING DIVISION, ANR (802-241-3737) Contact:_____

____ Dam operations (greater than 500,000 cu. ft.)(241-3451)
____ Municipal water/sewer

9. POLLUTION PREVENTION HOTLINE (1-800-974-9559) **RECYCLING HOTLINE (1-800-932-7100)**

10. DEPARTMENT OF FISH & WILDLIFE, ANR (802-241-3700) Contact:_____

____ Nongame & Natural Heritage program (Threatened & Endangered Species)
____ Stream Obstruction Approval 479-4434

11. DEPARTMENT OF LABOR AND INDUSTRY (802-~~828-2106~~) or District Office# ROBERT MACKIN

_X_ Construction Permit fire prevention, electrical, plumbing, access
____ Storage of flammable liquids, explosives
____ Plumbing in residences served by public water/sewer with 10 or more customers
_2_ Boilers and pressure vessels
_1_ LP Gas Storage

12. DEPARTMENT OF HEALTH (800-439-8550) (Lab 800-660-9997) Contact:_____

____ Food, lodging, bakeries, food processors
____ Children's camps
____ Program for asbestos control & lead certification
____ Hot Tub Installation & Inspection - Commercial

13. AGENCY OF HUMAN SERVICES Contact:_____

____ Child care facilities (241-2158)
____ Nursing Homes (241-2345)
____ Residential care homes (241-2345) (Dept. of Aging & Disabilities)
____ Therapeutic Community Residence (241-2345)

14. AGENCY OF TRANSPORTATION Contact: JOE LAWDRY 828-2691

_X_ Access to state highways (residential, commercial) (828-2653)
____ Signs (Travel Information Council) (828-2651)
____ Development within 500' of a limited access highway (828-2653)
_X_ Construction within state highway right-of way (Utilities, Signs, etc.) (828-2653)
____ Junkyards (828-2049)
____ Railroad crossings (828-2760)
____ Airports and landing strips (828-2833)

15. DEPARTMENT OF AGRICULTURE Contact:_____

____ Use/sale of pesticides (828-2431)
____ Milk processing facilities (828-2433)
____ Golf courses (828-2431)
____ Green Houses/Nurseries (828-2431)
____ Slaughter houses, poultry processing (828-2426)
____ Animal shelters/kennels/livestock dealers (828-2421)
____ Weights and measures, Gas Pumps, Scales (828-2436)
____ Retail Sales/Milk/Meat/Poultry/Oleo/Class "C" Pesticides (828-2436)

16. PUBLIC SERVICE BOARD (802-828-2358) ____ Hydro projects ____ Sells water to 1 or more persons
17. DIVISION FOR HISTORIC PRESERVATION (802-828-3226) ____ Historic buildings ____ Archeological sites
18. DEPARTMENT OF LIQUOR CONTROL (1-800-832-2339) ____ Liquor licenses ____ General Info (1-800-642-3134)
19. SECRETARY OF STATE (1-802-828-2366) ____ Business registration ____ Professional Boards (1-800-439-8683)
20. DEPARTMENT OF TAXES (802-828-2551) ____ Business taxes (sales, meals & rooms, amusement machines)
21. DEPARTMENT OF MOTOR VEHICLES (802-828-2074) ____ Fuel taxes; commercial vehicle ____ Franchise tax/solid waste
22. LOCAL PERMITS (SEE YOUR TOWN CLERK, ZONING ADMINISTRATOR, PLANNING COMMISSION, OR PUBLIC WORKS)
23. FEDERAL PERMITS U.S. ARMY CORPS OF ENGINEERS, BLDG 10-18, CAMP JOHNSON, COLCHESTER, VT 05446 (655-0334)
OTHER:_____

REVISION DATE:_____ 8/23/95

File
separator